

Model 4610A Accelerometer



High Performance DC Response
Micro-g Resolution, Low Noise
Advanced Temp Compensation
5,000 g Over-Range Protection

The **Model 4610A** is an ultra low-noise accelerometer designed for both static and dynamic measurements. The accelerometer offers integral temperature compensation with dynamic range from ± 2 to $\pm 500g$. The model 4610A incorporates a gas damped MEMS element with mechanical overload stops for high-g shock protection. The accelerometer has an operating temperature range of -55°C to $+125^{\circ}\text{C}$.

FEATURES


- $\pm 2g$ to $\pm 500g$ Dynamic Range
- 5,000g Shock Protection
- Signal Conditioned Output
- 8 to 30Vdc Excitation Voltage
- Gas Damping
- Integral Strain Relief
- Temperature Compensated

APPLICATIONS

- Low Frequency Monitoring
- Transportation
- Flight Testing
- Test & Instrumentation
- Machine Control
- Transportation Testing



dimensions

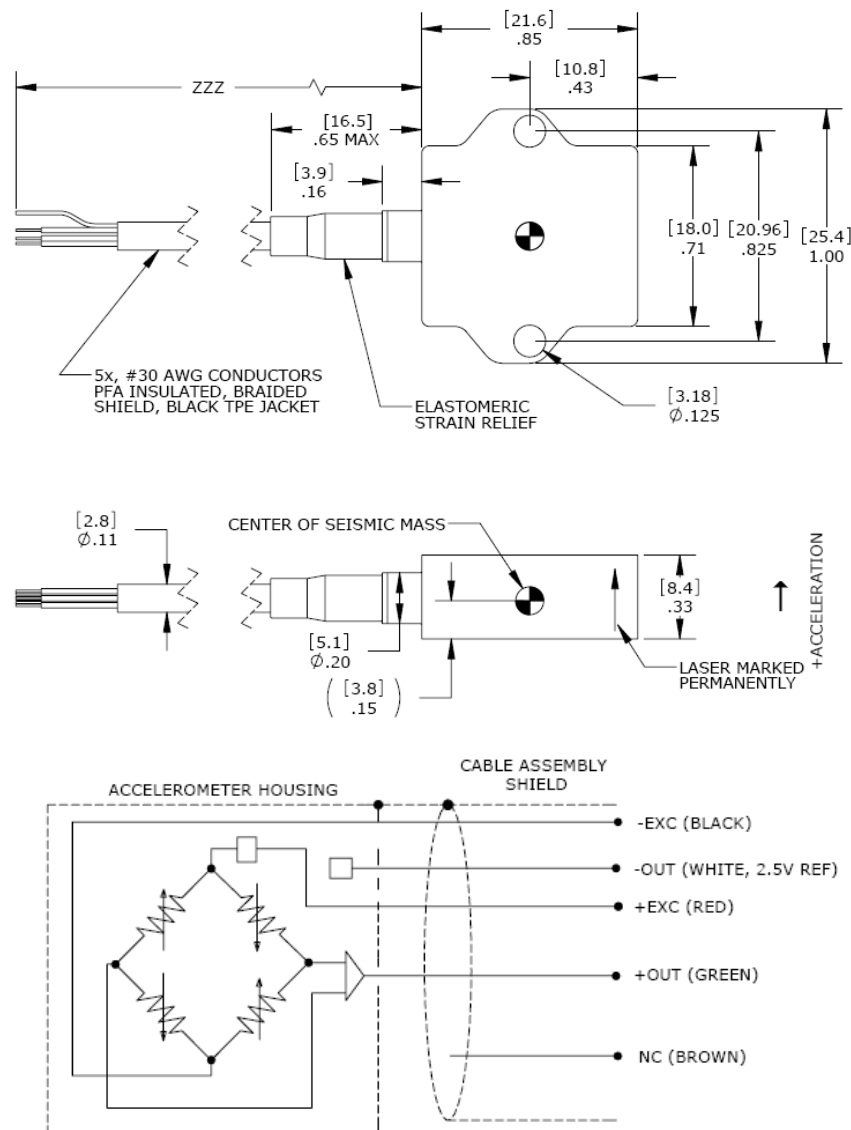

Model 4610A Accelerometer

performance specifications

All values are typical at +24°C, 80Hz and 12Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters

	±2	±3	±5	±10	±20	±50	±100	±200	±500	Notes
DYNAMIC										
Range (g)	±2	±3	±5	±10	±20	±50	±100	±200	±500	
Sensitivity (mV/g)	1000	667	400	200	100	40	20	10	4	±10%
Frequency Response (Hz)	0-200	0-250	0-300	0-400	0-600	0-1000	0-1500	0-1500	0-1500	±5%
Frequency Response (Hz)	0-400	0-450	0-500	0-600	0-1000	0-1500	0-2000	0-2000	0-2000	±1dB
Natural Frequency (Hz)	700	750	800	1000	1500	4000	6000	8000	10000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.5	
Shock Limit (g)	2000	2000	2000	5000	5000	5000	5000	5000	5000	
Residual Noise (µV RMS)	25	30	20	23	31	26	32	32	32	Passband
Residual Noise (µg/√Hz RMS)	2	3	3	6	13	21	41	82	210	Spectral
ELECTRICAL										
Zero Acceleration Output (mV)	±50									Differential
Excitation Voltage (Vdc)	8 to 30									
Excitation Current (mA)	<12									
Bias Voltage (Vdc)	2.5									
Full Scale Output Voltage (Vdc)	±2									
Output Resistance (Ω)	<100									
Insulation Resistance (MΩ)	>100									@100Vdc
Turn On Time (msec)	<100									
Ground Isolation	Isolated from Mounting Surface									
ENVIRONMENTAL										
Thermal Zero Shift (%FSO/°C)	±0.010									-40 to +100°C
Thermal Sensitivity Shift (%/°C)	±0.014									-40 to +100°C
Operating Temperature (°C)	-55 to +125									
Compensated Temperature (°C)	-40 to +100									
Humidity	Epoxy Sealed, IP62									
PHYSICAL										
Case Material	Anodized Aluminum									
Cable	4x #30 AWG Conductors PFA Insulated Leads, Braided Shield, TPE Jacket									
Weight (grams)	7 (cable not included)									
Mounting	2x #4 or M3 Screws									
Mounting Torque	6 lb-in (0.7 N-m)									

Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit
Supplied accessories:	AC-A02285	2x #4-40 (7/16 length) Socket Head Cap Screw and Washer
Optional accessories:	AC-D02669 121	Triaxial Mounting Block 3-Channel Precision Low Noise DC Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range+Cable Length

4610A-GGG-CCC

 | |_____Cable (060 is 60 inches)
 |_____Range (002 is 2g)

Example: 4610A-002-060
 Model 4610A, 2g, 60" (5ft) Cable

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际D座302

电话: +86 010 8477 5646

传真: +86 010 5894 9029

邮箱: sales@sensorway.cn

http://www.sensorway.cn