

Model 3803A Accelerometer



Triaxial DC Accelerometer
Gas Damped, mV Output
Hermetically Sealed
5,000g Over-Range Protection

The **Model 3803A** is a triaxial piezoresistive MEMS accelerometer in a rugged welded hermetic package. The accelerometer incorporates mechanical stops for over-range protection up to greater than 5,000g. The model 3803A is offered in ranges from ± 2 to $\pm 2000g$ and is gas damped to provide a wide frequency response. The accelerometer is temperature compensated to provide a stable output over the operating environment.

FEATURES


- $\pm 2g$ to $\pm 2000g$ Dynamic Range
- 5,000g Shock Protection
- Hermetically Sealed
- Gas Damping
- mV Output, DC Response
- Stud or Screw Mounting

APPLICATIONS

- Impact Testing
- Structural Testing
- Test and Instrumentation
- Environmental Testing
- Vehicle Testing



dimensions

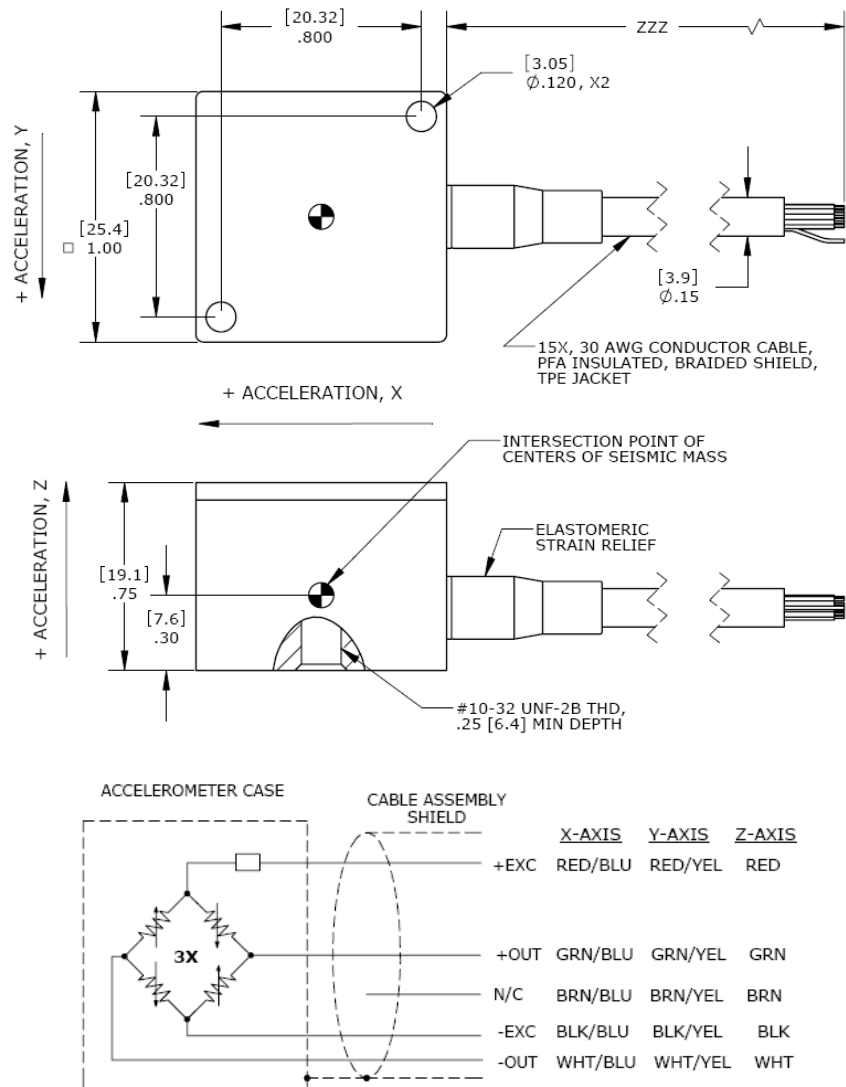

Model 3803A Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters									Notes
DYNAMIC									
Range (g)	±2	±10	±20	±50	±100	±200	±500	±2000	
Sensitivity (mV/g)	12	6	3	1.5	0.7	0.7	0.3	0.1	@10Vdc Exc
Frequency Response (Hz), Z Axis	0-100	0-300	0-400	0-800	0-1200	0-1300	0-1800	0-4000	±5% ¹
Frequency Response (Hz), X & Y Axis	0-100	0-300	0-400	0-600	0-700	0-800	0-1100	0-2500	±1dB
Natural Frequency (Hz)	300	500	1000	3000	5000	6000	7000	10000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<3	
Damping Ratio	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.3	
Shock Limit (g)	2000	2000	2000	5000	5000	5000	5000	5000	
ELECTRICAL									
Zero Acceleration Output (mV)	±25								Differential
Excitation Voltage (Vdc)	5 to 10								
Input Resistance (Ω)	4000 to 10000								
Output Resistance (Ω)	2400 to 6000								
Insulation Resistance (MΩ)	>100								@100Vdc
Residual Noise (µV RMS)	10								Maximum
Ground Isolation	Isolated from Mounting Surface								
ENVIRONMENTAL									
Thermal Zero Shift (%FSO/°C)	±0.04								
Thermal Sensitivity Shift (%/°C)	±0.05								
Operating Temperature (°C)	-40 to +105								
Compensated Temperature (°C)	-20 to +85								
Storage Temperature (°C)	-40 to +105								
Humidity	Environmentally Sealed, IP65								
PHYSICAL									
Case Material	Stainless Steel								
Weight (grams)	65								
Mounting	2x #4 or M3 Screws, or #10-32 to #10-32 Mounting Stud								
Mounting Torque	18 lb-in (2 N-m)								
Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit ¹							
Supplied accessories:	AC-D02995	2x #4-40 (7/8" length) Socket Head Cap Screw and Washer							
Optional accessories:	121	3-Channel Precision Low Noise DC Amplifier							
	140	Auto-zero Inline Amplifier							

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range+Cable Length

3803A-GGG-CCC

| |
 | | _____ Cable (120 is 120 inches)
 | _____ | Range (050 is 50g)

Example: 3803A-050-120
Model 3803A, 50g, 120" (10ft) Cable

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际D座302
电话：+86 010 8477 5646
传真：+86 010 5894 9029
邮箱：sales@sensorway.cn
<http://www.sensorway.cn>