

Model 606M2 Accelerometer




Seat Pad Accelerometer
Removable IEPE Accelerometer
Whole Body Vibration
100mV/g Output
ISO 10326-1 Configuration



The **Model 606M2** is an IEPE triaxial seat pad accelerometer designed specially for characterizing whole body vibration in accordance with ISO 2631-1 and ISO 8041. The seat pad incorporates a removable triaxial IEPE accelerometer with 100mV/g output sensitivity. The model 606M2 is designed for low frequency measurements with a measurement resolution of <math><0.4\text{mg}</math>. A detachable 10ft cable is included with three BNC connectors for simple interface.

dimensions

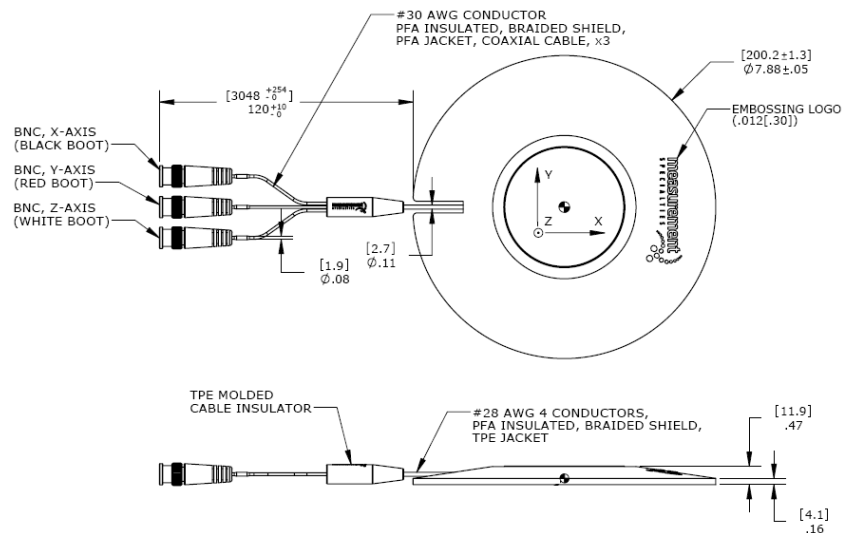


FEATURES

- Three Independent Circuits
- IEPE Interface
- $\pm 50\text{g}$ Dynamic Range
- High Over-Range Protection
- 0.5-1000Hz Frequency Response
- Stable Temperature Response

APPLICATIONS

- Whole Body Vibration Study
- Vibration/Shock Monitoring
- Helicopter Flight Testing
- Heavy Equipment Testing
- Biodynamic Study

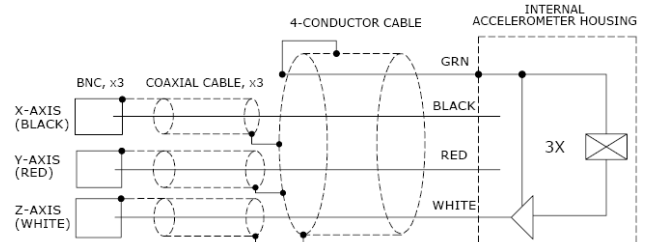

Model 606M2 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 4mA excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1003 for Plug & Play AC Accelerometers.

Parameters		Notes
DYNAMIC		
Range (g)	±50	
Sensitivity (mV/g)	100	±10%
Frequency Response (Hz)	0.5-1000	±5%
Natural Frequency (Hz)	>25000	
Non-Linearity (%FSO)	±1	
Transverse Sensitivity (%)	<5	
Shock Limit (g)	5000	
ELECTRICAL		
Compliance Voltage (Vdc)	18 to 30	
Excitation Current (mA)	2 to 10	
Bias Voltage (Vdc)	8 to 12	Room Temperature
Output Impedance (Ω)	<100	
Full Scale Output Voltage (V)	±5	
Residual Noise (g RMS)	0.0004	Broadband 1Hz to 10kHz
Discharge Time Constant (sec)	0.8 to 1.2	
ENVIRONMENTAL		
Temperature Response (%)	<0.17%/°C	
Operating Temperature (°C)	-20 to +85	
Storage Temperature (°C)	-20 to +85	
Humidity	Hermetically Sealed	
PHYSICAL		
Case Material (Seat Pad)	Nitrile Rubber	
Case Material (Accelerometer)	Titanium	
Sensing Element	Ceramic (shear mode)	
Case Material	Titanium	
Electrical Connector	3x BNC Connectors	
Weight (grams)	350	
Calibration supplied:	CS-LFREQ-0010	NIST Traceable Amplitude Calibration from 1Hz to 100Hz
Optional accessories:	161A	4-Channel PE & IEPE Signal Conditioner

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number
606M2

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际C座1002
电话：+ 86 010 8477 5646
传真：+ 86 010 5894 9029
邮箱：sales@sensorway.cn